

HT23 RTJ O / PRO



OUTSTANDING PERFORMANCE & PRODUCTIVITY

- > Very good working envelope
- > Basket load capacity 230 kg
- > Dual load 230-450 kg (option)

BEST COMFORT AND SAFETY FEELING

- > Haulotte Activ'Shield Bar 2.0 (standard on PRO)
- > Haulotte Activ'Lighting System for safe loading/unloading in conditions of low visibility (standard on PRO)
- > Quick, proportional and simultaneous movements
- > Rigid boom

MAXIMIZED TOTAL COST OF OWNERSHIP

- > Haulotte Activ'Screen diagnostic display for onboard fault & service alerts
- > Haulotte Stop Emission System automatically turns the engine off & on
- > Easy access to all components
- > Exclusive modular basket, quick and easy to repair

HT23 RTJ O / PRO


ROUGH TERRAIN TELESCOPIC BOOMS

TECHNICAL DATA

HT23 RTJ O HT23 RTJ PRO

4WD/2WS 4WD/4WS

| | | |
|-----------------------------------|--|-----------|
| Working height | 22.5 m | |
| Platform height | 20.5 m | |
| Horizontal outreach | 18.3 m | |
| Below ground reach | 4 m | |
| Lift capacity | 230 kg - 2 pers. (option : 450 kg - 3 pers.) | |
| F x G Platform size | 2.44 x 0.91 m | |
| A Length - stowed | 10.4 m | |
| H Length - transport | 7.8 m | |
| B Overall width | 2.47 m | |
| C Height - stowed | 2.7 m | |
| I Height - transport | 3.3 m | |
| Vertical jib rotation | 133° (+68/-65) | |
| Platform rotation | 180° (+90/-90) | |
| Boom rotation angle | 90° (+75/-15) | |
| Turntable rotation | 360° continuous | |
| Tailswing | 109 cm | |
| D Wheelbase | 2.5 m | |
| E Ground clearance | 34 cm | |
| Tilt | 5° | |
| Drive speed | 0.5 - 6.5 km/h | |
| Gradeability | 40 % | |
| Turning radius - outside | 6,3 m | 3,4 m |
| Tyres - foam-filled | 385/65 - 22.5 | |
| Fuel tank | 166 l | |
| Engine | Kubota 48.6 kW, stage 5 NRC: Kubota, 36.5kW, Stage 3A | |
| Weight | 13 320 kg | 13 400 kg |

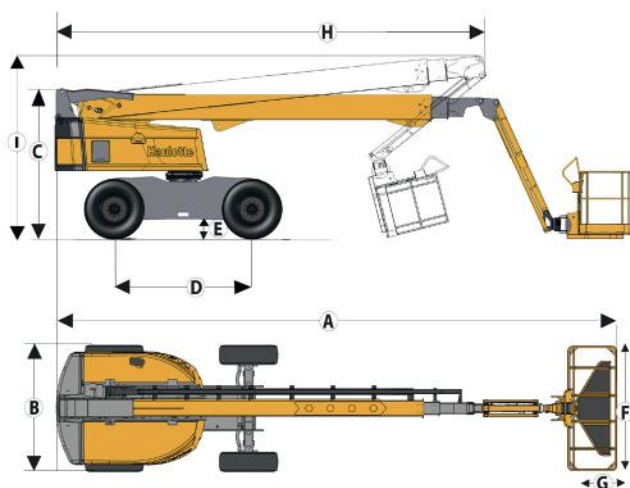

STANDARD EQUIPMENT

- > Haulotte Activ'Lighting System (standard on PRO)
- > Haulotte Activ'Shield Bar (standard on PRO)
- > Haulotte Stop Emission System
- > Haulotte Activ'Screen onboard colored monitor screen and diagnostic system
- > Universal telematics plug
- > 4 wheel drive / 2 (O) or 4 (PRO) wheel steer
- > Front oscillating axle increases stability on uneven ground
- > Proportional controls enhance comfort and safety
- > 4 simultaneous movements for maximum productivity
- > Automatic differential wheel lock increase rough terrain capacity
- > Upper control box protection cover and tool tray in ultra-solid composite
- > 230 kg load capacity unrestricted working envelope
- > Large modular basket 2.44 x 0.91 m, drop entry gate
- > Basket limitation +/- 10°
- > Prepared for power to platform 110 / 230V
- > Swing out engine tray for ease of maintenance
- > Sound and light alarm for tilt and load
- > Maximum wind speed 45 km/h
- > Rotating beacon
- > Driving alarm
- > Hour meter
- > Electric pump system and emergency descent
- > 12 V battery
- > Engine pre-heater with light indicator
- > Low fuel level indicator (upper control box)

OPTIONS AND ACCESSORIES

- > Haulotte Activ'Lighting System (O model)
- > Haulotte Activ'Shield Bar 2.0 (O model)
- > Dual load capacity 230 / 450 kg (2-3 persons)
- > Narrow modular platform 1.83 m x 0.8 m
- > Power to platform (Female plug in the basket with or without circuit-breaker 30mA)
- > Air line to platform
- > Lateral swing door entry gate
- > 3.5 kW, 6,5 kW, 12 kW (Only NA) hydraulic generator
- > Biodegradable hydraulic oil
- > 60km/h wind speed
- > Warm environment package
- > Cold weather package / Kit Arctic
- > Pipe cradle pack
- > Glazier pack
- > Working lights

