

CAMSO MPT 753



TELEHANDLERS



COMPACT
WHEEL
LOADERS



MINI-
DUMPERS



THE NEXT GENERATION IN VERSATILITY AND DURABILITY

Engineered to provide enhanced traction in a variety of surface applications without sacrificing ride quality. Excellent overall durability and puncture resistance ensure maximum service life.

camso.co

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE




TRACTION



CAMSO

ROAD
FREE
COMPANY

CAMSO MPT 753



FLAT NON-DIRECTIONAL TREAD PATTERN WITH HIGH LUG-TO-VOID RATIO

- Enhances stability, ride quality and durability

VOID GUARD IMPACT PROTECTION

- Protects from tread punctures to minimize flat tires

IMPACT GUARD SIDEWALL DESIGN

- Deflects debris to better protect sidewalls and reduce stress cracking

STEPPED AND OPEN SHOULDER LUGS


- Enhances traction on softer surfaces for better versatility

TIRE SIZE	TL/TT	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	APPLI-CATION	MAXIMUM TIRE LOAD [kg]						
		Recom-mended	Alternative	O.D. [mm]	O.W. [mm]	O.T.D. [mm]				Inflation pressure [bar]	STATIC	5 km/h	10 km/h	15 km/h	30 km/h	50 km/h
340/80-18 IND (12.5-18; 335/80-18)	TL	11	12; 11 SDC; 12 SDC; W10; W11	1005	350	21	143	A8	CYCLIC	4.00	6270	4550*	4090**	3650	2915	2480
									CONSTANT	4.00	6270	3950	3405	3080	2835	2480
340/80-20 IND (12.5-20; 335/80-20)	TL	11	12; 11 SDC; 12 SDC; W10; W11	1067	355	25	144	A8	CYCLIC	4.00	6440	4675*	4200**	3750	2995	2550
									CONSTANT	4.00	6440	4060	3500	3165	2910	2550
400/70-20 IND (405/70-20; 16.0/70-20)	TL	13	DW12; 13 SDC; DW13; DW13L; DW14L	1100	405	27	155	A8	CYCLIC	5.00	8915	6470*	5815**	5195	4145	3525
									CONSTANT	5.00	8915	5620	4845	4380	4030	3525
400/70-24 IND (405/70-24; 16.0/70-24)	TL	13	DW12; 13SDC; DW13; DW13L; DW14L; TW13; TW14L	1187	402	29	158	A8	CYCLIC	5.00	9775	7100*	6375**	5695	4550	3870
									CONSTANT	5.00	9775	6165	5315	4805	4420	3870
400/80-24 IND (15.5/80-24)	TL	DW13	DW12; DW13L; DW14L; TW13; TW14L	1244	412	33	162	A8	CYCLIC	5.00	10925	7935*	7125**	6365	5085	4325
									CONSTANT	5.00	10925	6890	5940	5370	4940	4325
460/70-24 IND (17.5L-24)	TL	DW15L	DW14L; DW16L; TW14L; TW15L; TW16L	1251	452	33	159	A8	CYCLIC	4.00	10065	7305*	6565**	5865	4680	3980
									CONSTANT	4.00	10065	6345	5470	4945	4550	3980

* Cyclic: One way distance up to 150 m

** Cyclic: One way distance up to 600 m

TIRE LIFE

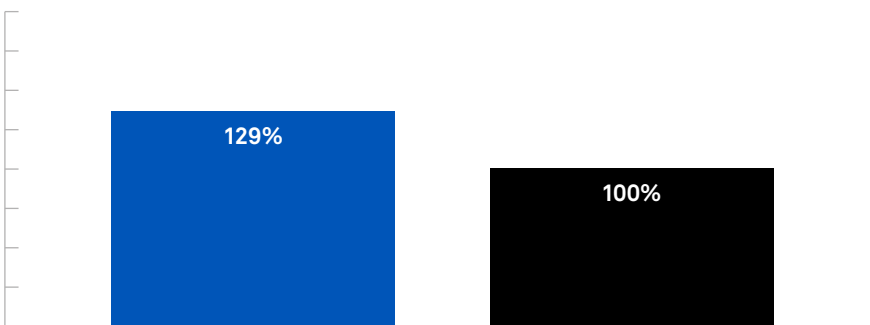

CAMSO MPT 753

SOLIDEAL 4L I3

Due to better rubber compound and an optimized tread design, Camso MPT 753 demonstrated 29% better life performance compared to Solideal 4L I3 in controlled conditions.

AUTHORIZED DISTRIBUTOR:

camso.co



FORMERLY CAMOPLAST SOLIDEAL