


Testing and Technical Information

Tested to the global benchmark in barrier safety


bsi.
PAS 13
Code of Practice for Workplace Safety Barriers

How energy (Joules) is transferred from a vehicle impact

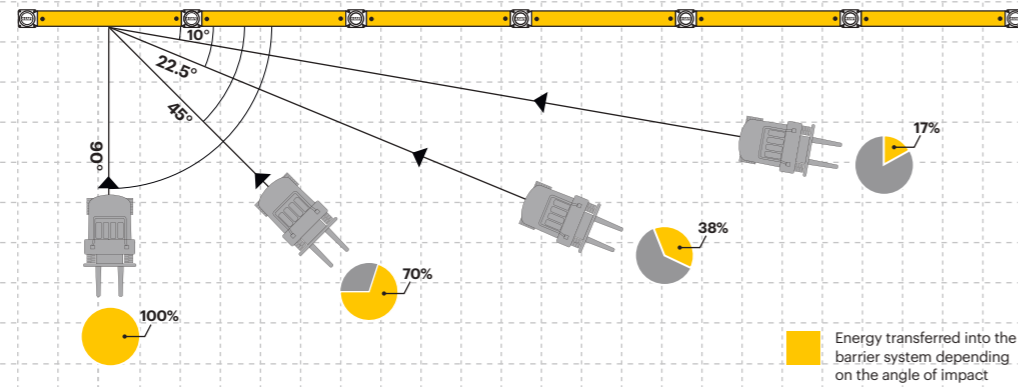


Impact Test on 1500mm Post Centres	Max Vehicle Energy the barrier can withstand at the Impact Angle			
	90°	45°	22.5°	10°
Mid Rail Max Energy (Joules)	4,550	6,500	12,000	26,450

End Post Max Energy (Joules) - 90°	3,000
Mid Post Max Energy (Joules) - 90°	3,000

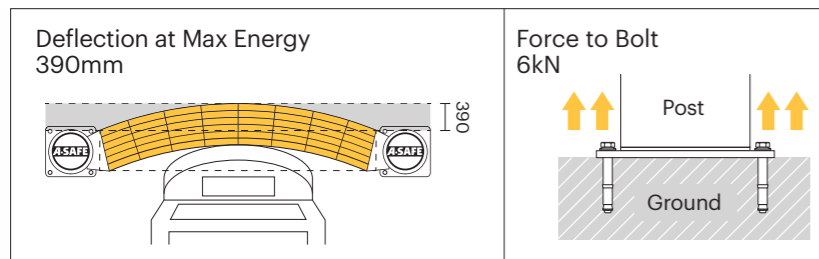

Material Properties	MEMAPLEX™
Temperature Range	-10°C to 50°C
Ignition Temperature	370°C to 390°C
Flash Point	350°C to 370°C
Toxicity	Not Hazardous
Chemical Resistance	Excellent - ISO/TR 10358
Weathering Stability (Grey Scale)	5/5*
Light Stability (Blue Wool Scale)	7/8**
Static Rating (Surface Resistivity)	1015 - 1016 Ω
Hygiene Seals	Yes


* Weathering scale 1 is very poor and 5 is excellent
** Light stability scale 1 is very poor and 8 is excellent

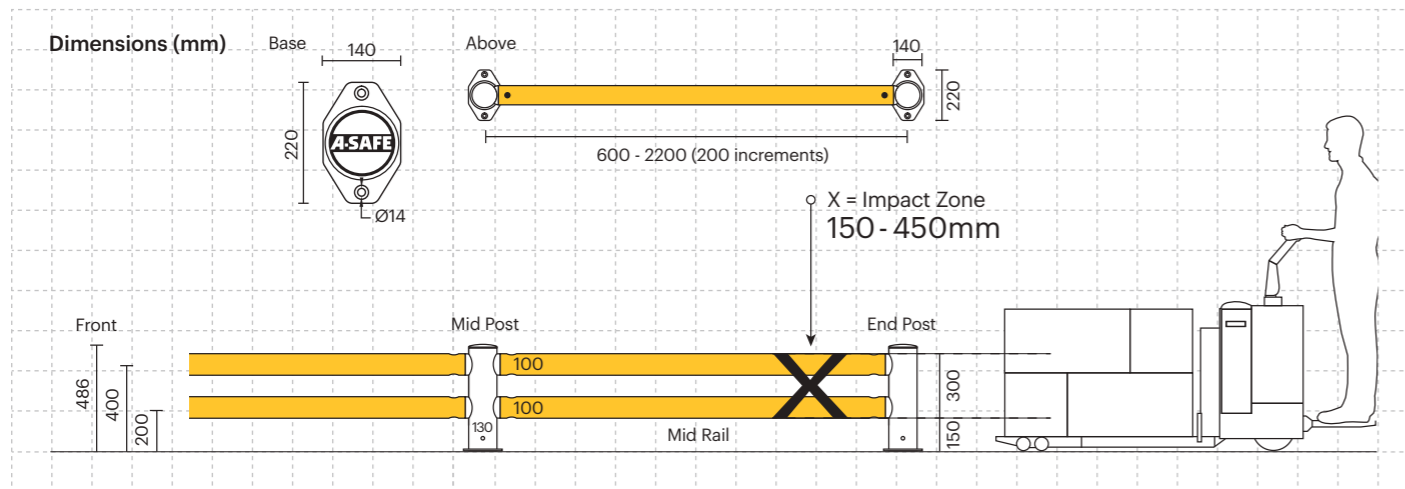

Post Options



Rail Options

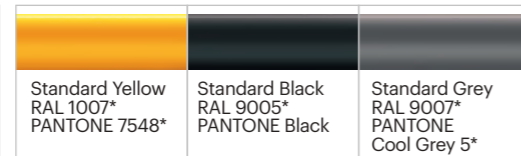

Colour Combinations

*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.



mFlex™
Double Traffic Barrier

A-SAFE



Designed to safeguard walls, structures, goods and machinery from hand operated equipment as well as pedestrian operated powered pallet trucks.

Such impacts can damage surfaces, materials and stock over time, degrading safety and causing equipment to break down.

The Double Rail increases the height and strength of the impact zone, providing greater resistance to impact forces and improved protection against wear-and-tear from frequent collisions.


Tested to the global benchmark in barrier safety

bsi.
PAS 13
Code of Practice for Workplace Safety Barriers





Engineered for performance

Whether in the resilience, flexibility and in-built memory of our exclusive Memaplex™ material or the unrivalled energy absorption of our unique 3-phase coupling system, a wealth of technical ingenuity goes into every A-SAFE product to ensure that it performs perfectly every time you need it to. We are continuously innovating to solve the greatest workplace safety challenges on behalf of our customers and our numerous patents attest to our industry-leading commitment to research and development.

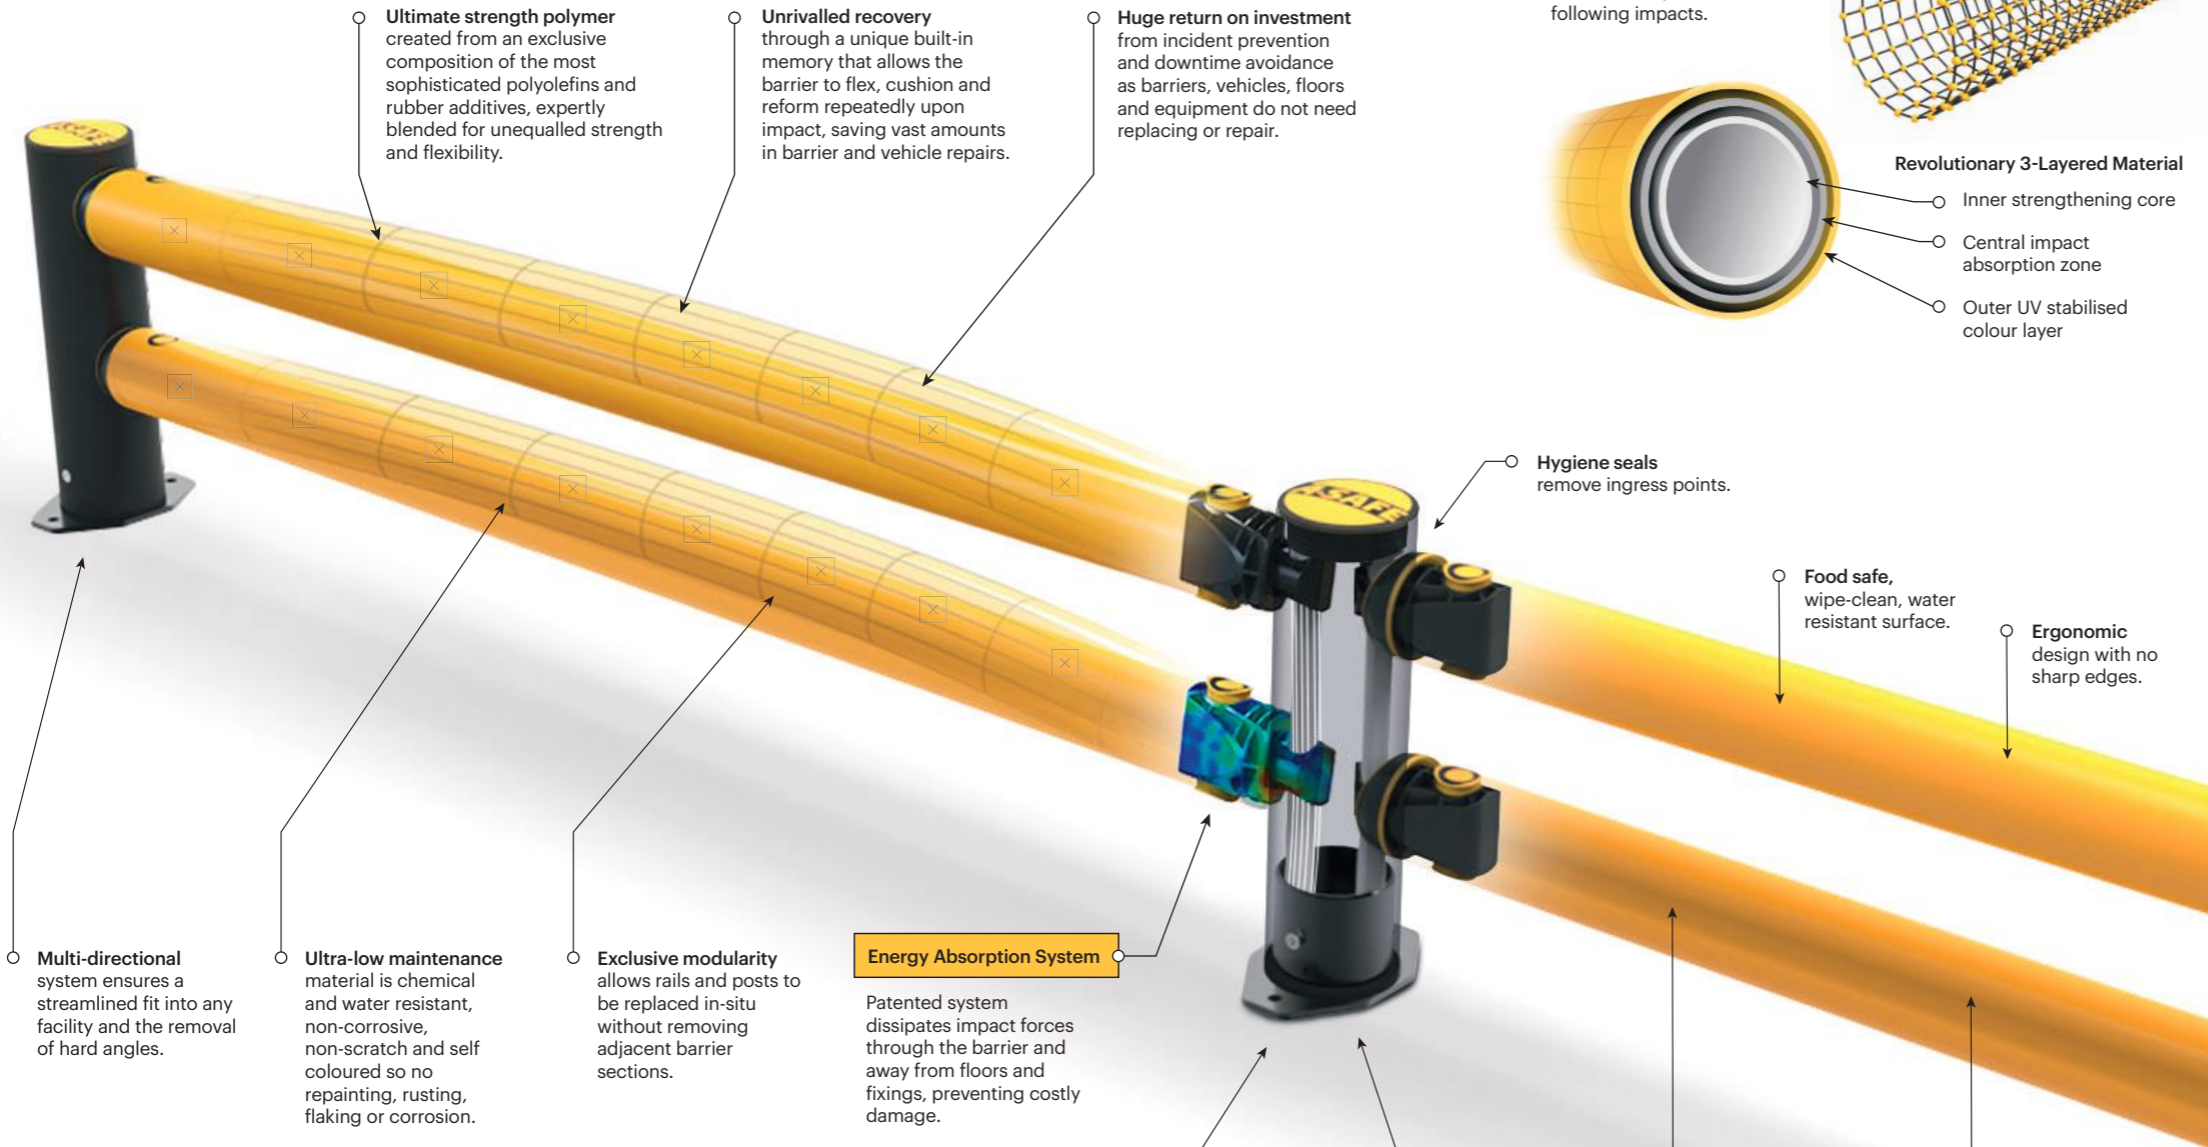

MEMAPLEX™

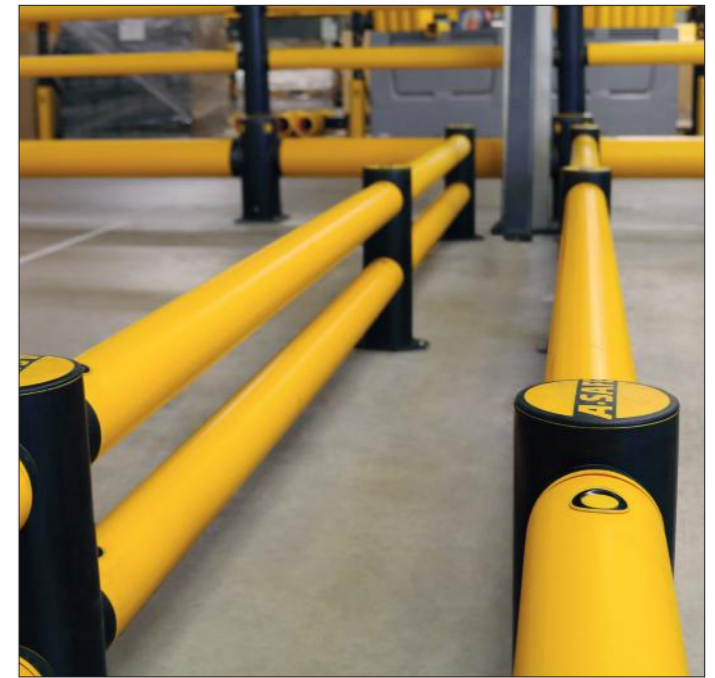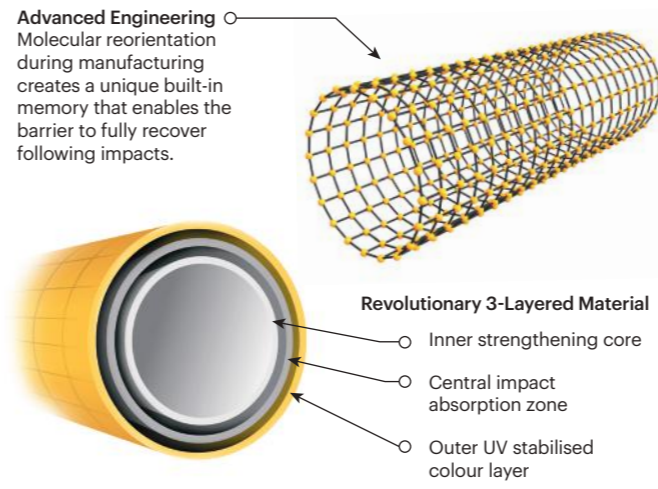

ADDITIONAL BASE OPTIONS

Countersunk Bolts Creates a flat surface, preventing tyre damage where vehicles are in close proximity.	Galvanised Steel Increased weather resistance for outdoor use and harsh climate environments.	Stainless Steel 316 Standard Ultimate performance option, no corrosion or rusting and resistant to powerful cleaning agents. Ideal for hygiene environments.	Stainless Steel 316 Countersunk

