



# A-SAFE

## eFlex™ ForkGuard™ Kerb Barrier



Designed to provide ground level protection for walls, buildings and equipment.


The eFlex ForkGuard deflects vehicle forks in shallow angle or low-force impacts. It also acts as a pallet stop or buffer preventing stored goods encroaching into pedestrian areas or walkways.

Floor mounted and bolted from above, the eFlex ForkGuard integrates with A-SAFE barriers when installed together.


Tested to the global benchmark in barrier safety

**bsi. PAS 13**  
Code of Practice for Workplace Safety Barriers

# Engineered for performance

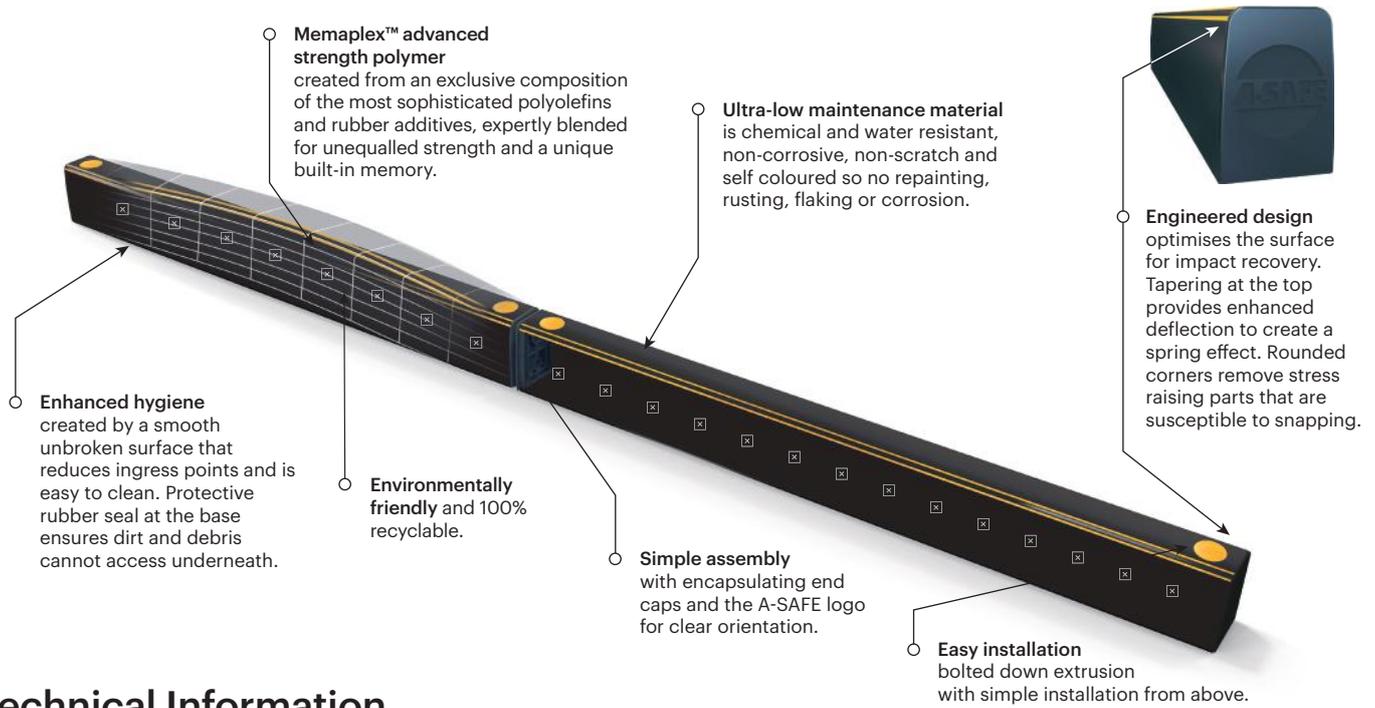


## Technical Information
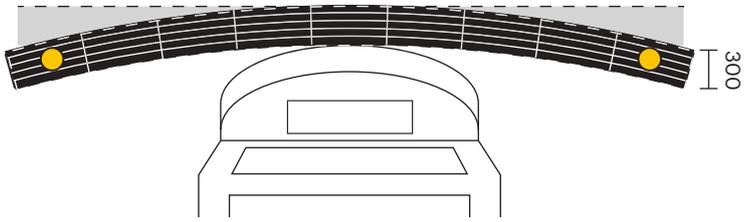
| Impact Test                                                                         |
|-------------------------------------------------------------------------------------|
| Max Energy (Joules) at 90° <b>3,000</b>                                             |
| Deflection at Max Energy<br>300mm                                                   |
|  |

| Material Properties                 | MEMAPLEX™                |
|-------------------------------------|--------------------------|
| Temperature Range                   | -10°C to 50°C            |
| Ignition Temperature                | 370°C to 390°C           |
| Flash Point                         | 350°C to 370°C           |
| Toxicity                            | Not Hazardous            |
| Chemical Resistance                 | Excellent - ISO/TR 10358 |
| Weathering Stability (Grey Scale)   | 5/5*                     |
| Light Stability (Blue Wool Scale)   | 7/8**                    |
| Static Rating (Surface Resistivity) | 1015 - 1016 Ω            |
| Hygiene Seals                       | No                       |

\* Weathering scale 1 is very poor and 5 is excellent  
 \*\* Light stability scale 1 is very poor and 8 is excellent

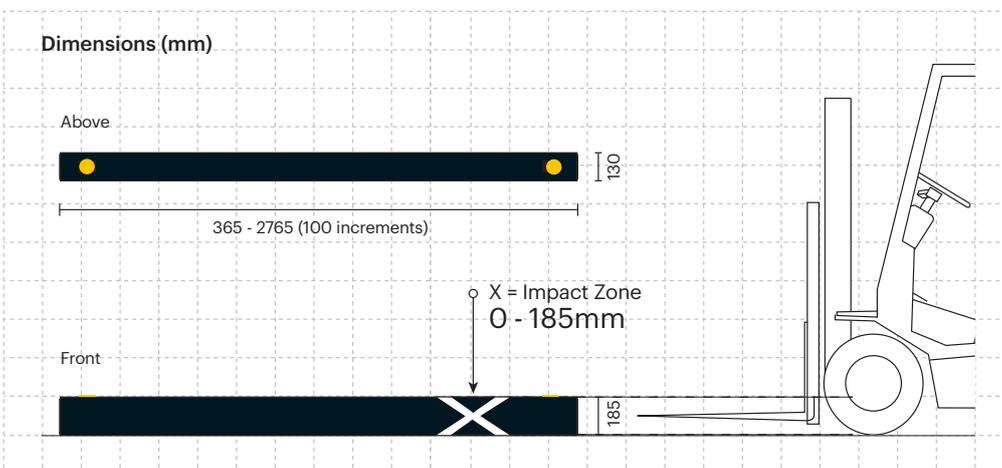

### Colour Combinations



\*Please note that the RAL and PANTONE colours listed are the closest match to standard A-SAFE colours, but may not be exact matches of the actual product colour and should be used for guidance only.