

CAMSO BHL 530

FORMERLY SOLIDEAL MR F3



BACKHOE
LOADERS



PERFORMANCE AND QUALITY YOU CAN RELY ON

Delivers reliable performance and quality for tough backhoe applications. Count on this all-purpose steer tire for excellent stability and improved operator comfort on a variety of surfaces.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO BHL 530



ENGINEERED F3 RIB TREAD DESIGN

- Provides smooth ride and effective steering

ROBUST CARCASS

- Reduces tread crowning for even wearing and excellent stability



DEEP TREAD DEPTH

- Enhances longevity

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE [bar] [PSI]	APPLI-CATION	MAXIMUM TIRE LOAD [kg] [lb]				
			Recommended	Alternative	O.D. [mm] [in.]	O.W. [mm] [in.]	O.T.D. [mm] [32°]					Static	8 km/h 5 mph	16 km/h 10 mph	40 km/h 25 mph	50 km/h 30 mph
11L-15SL	10	TBLS	8LBx15	10LBx15	768	280	13.5	118	B	3.00	-	2640	-	-	-	1320
					30.2	11.0	17			5850		-	-	-	2900	
11L-16SL	12	TBLS	8LBx16	W8L, 10LB, W10Lx16	802	262	13.5	123	B	3.60	-	3110	-	-	-	155
					31.6	10.3	17			6850		-	-	-	3450	
14L-16.1SL* <i>(replaces 14.5/75-16.1SL)</i>	14	TBLS	W11Cx16.1	-	940	361	17	138	B	3.60	-	4720	-	2175	-	2360
					37.0	14.2	21			10405		-	5986	-	5203	

* Replaces 14.5/75-16.1SL 10 ply to conform to ETRTO specifications.
 14L-16.1SL 14 ply is dimensionally the same and can be mixed with and used in place of earlier 14.5/75-16.1SL branded BHL 530 tires.
 Inflate to recommended air pressure according to machine manufacturer guidelines.

11L16 12PR BHL 530

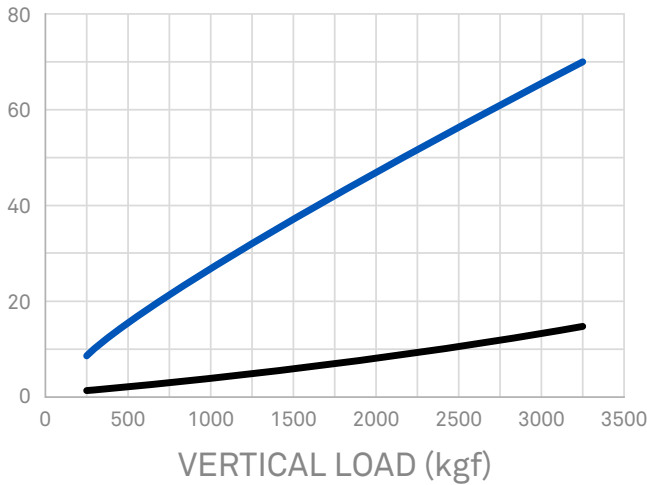

The Camso BHL 530 front backhoe tire features a stronger carcass construction for **improved stability under load** with reduced tread crowning

■ VERTICAL DEFLECTION (mm) ■ HORIZONTAL DEFLECTION (mm)

AUTHORIZED DISTRIBUTOR:

camso.co



FORMERLY CAMOPLAST SOLIDEAL