

# CAMSO CMP 576

FORMERLY SOLIDEAL SM C1



COMPACTORS



## EXCELLENT COMPACTION PERFORMANCE

Provides excellent performance and durability. Wears evenly and reduces ground pressure for maximum compaction.

[camso.co](http://camso.co)

## PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



# CAMSO CMP 576



### SMOOTH, FLAT TREAD PROFILE

- Promotes even wear and reduced ground pressure for better compaction performance

### HEAT-RESISTANT RUBBER COMPOUND


- Improves durability for lower cost per hour

### ROBUST TREAD SHOULDER


- Provides optimum compaction and minimal grooving

TIRE SIZE	PR	TT / TBLS	TUBE	VALVE	FLAP	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	TRA CODE	LOAD CAPACITY [kg] [lb]	
						Recommended	Alternative	O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]				10 km/h 6 mph	15 km/h 9 mph
7.50-15 NHS	14	TT	700/750/815-17	TR 440	7.00/7.50/8.25-15	6.00	6.50	788	214	226	136	A3	C-1	2835	2270
								31.0	8.4	8.9				6250	5000
8.50/90-15K	6	TBLS	-	-	-	6.00	5.5F	761	217	-	120	A3	C-1	1770	1400
								30.0	8.5	-				3900	3100
11.00-20 NHS	16	TT	10.00/11.00-20	V3-02-15 TR 444	8.25/9.00/10.00/11.00/12.00-20	8.00	8.50	1056	287	313	158	A3	C-1	5445	4355
								41.6	11.3	12.3				12000	9600

## 7.50-15 PR 14

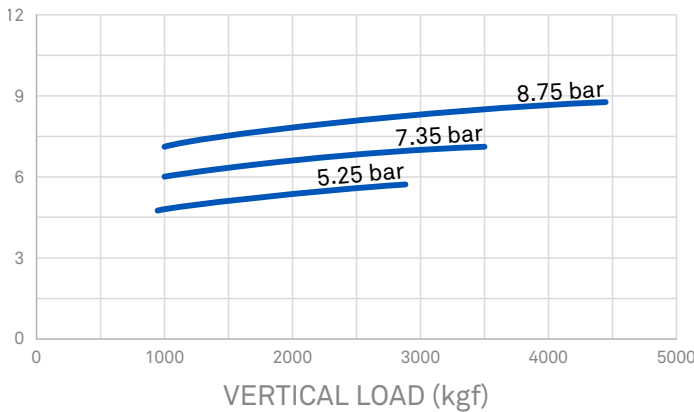

— POSITIVE CONTACT PRESSURE (kg/cm<sup>2</sup>)



Camso CMP 576 compactor tire features robust tread construction with breakers designed to limit tread crowning. This helps **promote even tread wear** and reduced ground pressure.

AUTHORIZED DISTRIBUTOR:

camso.co



FORMERLY CAMOPLAST SOLIDEAL